

ATTENUATOR - LC/APC FEMALE - MALE


Fixed Attenuator family offers high performance of variously fixed attenuation for industrial standard connections. Wide attenuation range, extremely low return loss, polarization insensitive, and excellent repeatability. Our attenuator complies with industry green initiative such as RoHS.

FEATURES & BENEFITS

- Wide attenuation range
- Low return loss
- Low PDL
- Polarization insensitive
- Various connector type
- Highly reliable

APPLICATIONS

- Optical telecommunication network
- CATV network
- Testing device accessory

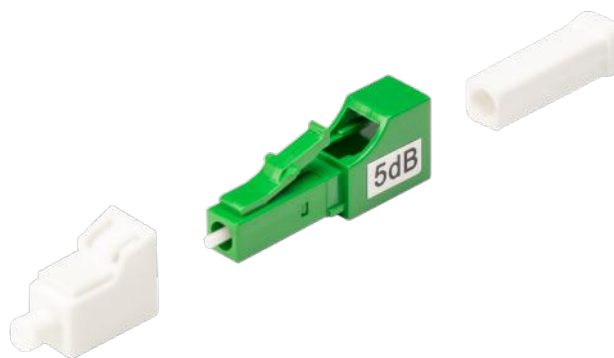

TECHNICAL SPECIFICATIONS	Min	Typical	Max	Unit
Operating Wavelength Range	1260~1620			nm
Return Loss	APC Type	65		db
Operating Temperature	-40		+85	°C
Tolerance	DB≤10 dB-±0.5&DB≥10 dB=±0.75			
Storage Temperature	-40		+85	°C